


KX PFA insulated

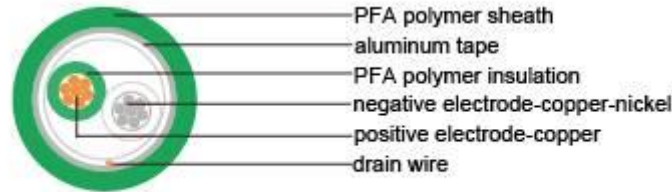

KCB FPA insulated

## Application

These cables are used with thermocouples for temperature measurements.

## Conductor

Solid or stranded. Material is according to thermocouple type.

## Insulation

PFA polymer

## Screen

Aluminum tape

## Drain wire

Tinned copper

## Outer sheath

PFA polymer

## Construction

Round

## Color code

According to IEC 60584-3

## Construction Parameters

### K Type

AWG(MM)	INSULATION MATERIAL	SCREEN MATERIAL	SHEATH MATERIAL	MAX. TEMP. (°C)	NOMINAL O.D. (MM)	WEIGHT (KG/KM)
24 (0.51)	PFA Polymer	Aluminum tape	PFA Polymer	260	2.7	13.4
24 (7/0.2)	PFA Polymer	Aluminum tape	PFA Polymer	260	2.9	13.8
20 (0.81)	PFA Polymer	Aluminum tape	PFA Polymer	260	3.7	30.0
20 (7/0.32)	PFA Polymer	Aluminum tape	PFA Polymer	260	3.8	30.3