

## Application

These cables are designed to connect electrical instrumentation and communication systems in and around process plants and similar applications. Generally used to transmit analogue or digital signals in measurement and process control where chemicals may be present.

## Construction

<b>CONDUCTOR</b>	Annealed copper, sizes: 0.5mm <sup>2</sup> and 0.75mm <sup>2</sup> multistranded(Class 5), 1.5mm <sup>2</sup> and 2.5mm <sup>2</sup> multistranded(Class 2) to BS EN 60228
<b>INSULATION</b>	PVC to BS EN 50290-2-21:2002, grade TI51
<b>PAIRING</b>	Two insulated conductors uniformly twisted together with a lay not exceeding 100mm, Two-pair cables without individual pair screens (quads) shall have four cores laid in quad formation round a central dummy
<b>COLOUR CODE</b>	Multicore cables: up to 40 cores yellow with black numbers, 41 - 80 cores black with yellow numbers. Multipair cables: See technical information
<b>BINDER TAPE</b>	Non-hygroscopic binder tape of minimum thickness 0.023 mm
<b>COLLECTIVE SCREEN</b>	Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm <sup>2</sup>
<b>OUTER SHEATH</b>	Extruded sheath of a PVC compound conforming to BS EN 50290-2-22:2002, grade TM51
<b>SHEATH COLOUR</b>	Generally black

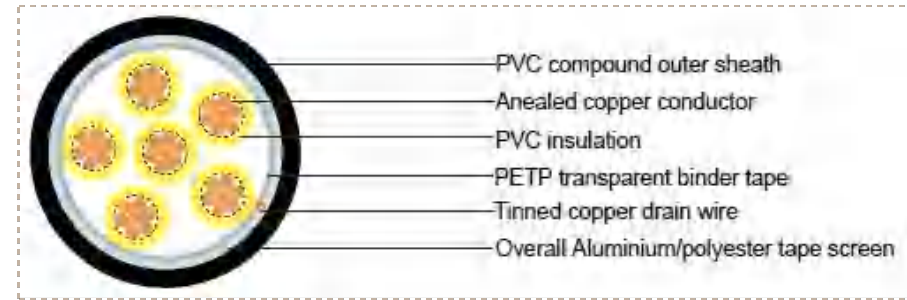
## Electrical Properties

Temperature range: above 0°C( fixed installation)

-15°C to +65°C(during operation )

<b>CONDUCTOR AREA SIZE</b>	<b>MM<sup>2</sup></b>	0.5	0.5	1.0	1.5	2.5
<b>CONDUCTOR STRANDING</b>	<b>NO. X MM</b>	1 x 0.8	16 x 0.2	1 x 1.13	7 x 0.53	7 x 0.67
<b>CONDUCTOR RESISTANCE MAX</b>	<b>OHM/KM</b>	36.8	39.7	18.4	12.3	7.6
<b>INSULATION RESISTANCE MIN</b>	<b>INDIVIDUAL CONDUCTOR</b>	<b>GOHM/KM</b>	5	5	5	5
	<b>INDIVIDUAL SCREEN</b>	<b>MOHM/KM</b>	1	1	1	1
<b>CAPACITANCE UNBALANCE AT 1 KHZ(PAIR TO PAIR SCREEN)</b>	<b>PF/250M</b>	250				
<b>MAX. MUTUAL CAPACITANCE @ 1 KHZ FOR NON OS OR OS CABLES (EXCEPT ONE-PAIR AND TWO-PAIRS)</b>	<b>PF/M</b>	75	75	75	85	105
<b>MAX. MUTUAL CAPACITANCE @ 1 KHZ IS/OS CABLES (INCLUDE 1 PAIR AND 2 PAIR)</b>	<b>PF/M</b>	115	115	115	120	140
<b>MAX. L/R RATIO FOR ADJACENT CORES(INDUCTANCE/RESISTANCE)</b>	<b>MH/OHM</b>	25	25	25	40	60
<b>TEST VOLTAGE</b>	<b>V</b>	2000	2000	2000	2000	2000

<b>RATED VOLTAGE</b>	<b>V</b>	300/500	300/500	300/500	300/500	300/500
----------------------	----------	---------	---------	---------	---------	---------

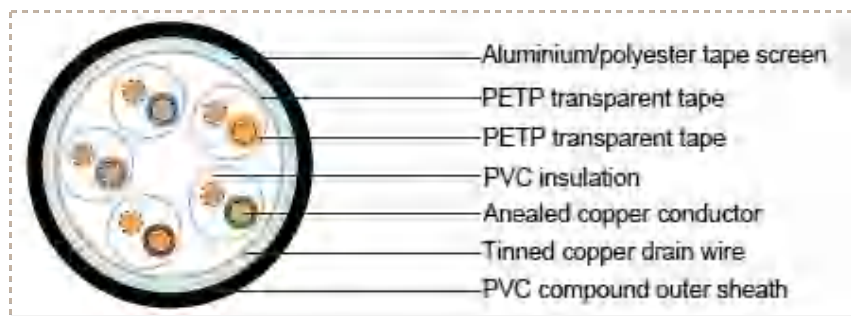
**Parameter  
Multicore**


NUMBER OF CORES	NUMBER AND DIAMETER OF WIRES	NOMINAL CONDUCTOR CROSS-SECTIONAL AREA	NOMINAL THICKNESS OF INSULATION	NOMINAL THICKNESS OF SHEATH	NOMINAL DIAMETER OF CABLE
	NO./MM	MM <sup>2</sup>	MM	MM	MM
stranded conductor 0.5 mm <sup>2</sup> (16/0.20mm)					
2	16/0.2	0.5	0.6	0.8	6
3	16/0.2	0.5	0.6	0.8	6.3
4	16/0.2	0.5	0.6	0.8	6.9
6	16/0.2	0.5	0.6	0.8	8.1
10	16/0.2	0.5	0.6	0.9	10.4
20	16/0.2	0.5	0.6	1	13.5
40	16/0.2	0.5	0.6	1.2	18.2
80	16/0.2	0.5	0.6	1.4	25.1
stranded conductor 0.75 mm <sup>2</sup> (24/0.20mm)					
2	24/0.2	0.75	0.6	0.8	6.4
3	24/0.2	0.75	0.6	0.8	6.8
4	24/0.2	0.75	0.6	0.8	7.4
6	24/0.2	0.75	0.6	0.9	8.9
10	24/0.2	0.75	0.6	1	11.5
20	24/0.2	0.75	0.6	1.1	14.8
40	24/0.2	0.75	0.6	1.3	19.9
80	24/0.2	0.75	0.6	1.5	27.5
stranded conductor 1.5 mm <sup>2</sup> (7/0.53mm)					

2	7/0.53	1.5	0.6	0.8	7.3
3	7/0.53	1.5	0.6	0.8	7.7
4	7/0.53	1.5	0.6	0.9	8.7
6	7/0.53	1.5	0.6	0.9	10.3
10	7/0.53	1.5	0.6	1	13.3
20	7/0.53	1.5	0.6	1.2	17.4
40	7/0.53	1.5	0.6	1.4	23.4
80	7/0.53	1.5	0.6	1.7	32.6

 stranded conductor 2.5 mm<sup>2</sup> (7/0.67mm)

2	7/0.67	2.5	0.6	0.8	8.1
3	7/0.67	2.5	0.6	0.9	8.8
4	7/0.67	2.5	0.6	0.9	9.7
6	7/0.67	2.5	0.6	1	11.7
10	7/0.67	2.5	0.6	1.1	15.1
20	7/0.67	2.5	0.6	1.3	19.9
40	7/0.67	2.5	0.6	1.5	26.7
80	7/0.67	2.5	0.6	1.9	37.3

**Multipair**


NUMBER OF PAIRS	NUMBER AND DIAMETER OF WIRES	NOMINAL CONDUCTOR CROSS-SECTIONAL AREA	NOMINAL THICKNESS OF INSULATION	NOMINAL THICKNESS OF SHEATH	NOMINAL DIAMETER OF CABLE
	NO./MM	MM <sup>2</sup>	MM	MM	MM
stranded conductor 0.5 mm <sup>2</sup> (16/0.20mm)					
1	16/0.2	0.5	0.6	0.8	6
2	16/0.2	0.5	0.6	0.8	6.9
5	16/0.2	0.5	0.6	1	11.9

10	16/0.2	0.5	0.6	1.1	16.4
15	16/0.2	0.5	0.6	1.2	19
20	16/0.2	0.5	0.6	1.3	21.5
30	16/0.2	0.5	0.6	1.5	25.7
50	16/0.2	0.5	0.6	1.7	32.9
stranded conductor 0.75 mm <sup>2</sup> (24/0.20mm)					
1	24/0.2	0.75	0.6	0.8	6.4
2	24/0.2	0.75	0.6	0.8	7.4
5	24/0.2	0.75	0.6	1	12.8
10	24/0.2	0.75	0.6	1.2	17.9
15	24/0.2	0.75	0.6	1.3	20.9
20	24/0.2	0.75	0.6	1.4	23.6
30	24/0.2	0.75	0.6	1.5	27.9
50	24/0.2	0.75	0.6	1.8	35.9
stranded conductor 1.5 mm <sup>2</sup> (7/0.53mm)					
1	7/0.53	1.5	0.6	0.8	7.3
2	7/0.53	1.5	0.6	0.9	8.7
5	7/0.53	1.5	0.6	1.1	15.1
10	7/0.53	1.5	0.6	1.3	21.1
15	7/0.53	1.5	0.6	1.4	24.6
20	7/0.53	1.5	0.6	1.5	27.7
30	7/0.53	1.5	0.6	1.7	33
50	7/0.53	1.5	0.6	2.1	42.7
stranded conductor 2.5 mm <sup>2</sup> (7/0.67mm)					
1	7/0.67	2.5	0.6	0.8	8.1
2	7/0.67	2.5	0.6	0.9	9.7
5	7/0.67	2.5	0.6	1.2	17.2
10	7/0.67	2.5	0.6	1.4	24.1
15	7/0.67	2.5	0.6	1.6	28.2
20	7/0.67	2.5	0.6	1.7	31.8

30	7/0.67	2.5	0.6	1.9	37.9
50	7/0.67	2.5	0.6	2.3	48.9